


On Board Module & Open Frame Series

Features

- Universal AC input / Full range
- **Ultra-miniature size**
- Protection: Short circuit / Overload /Over voltage
- No load power consumption < 0.5W
- Fully isolated plastic case
- **Isolation Class II (5~15W)**
- Low leakage current < 200µA (20W)
- Cooling by free air convection
- **Medical safety approved**
- Meets Industrial, IT safety requirements

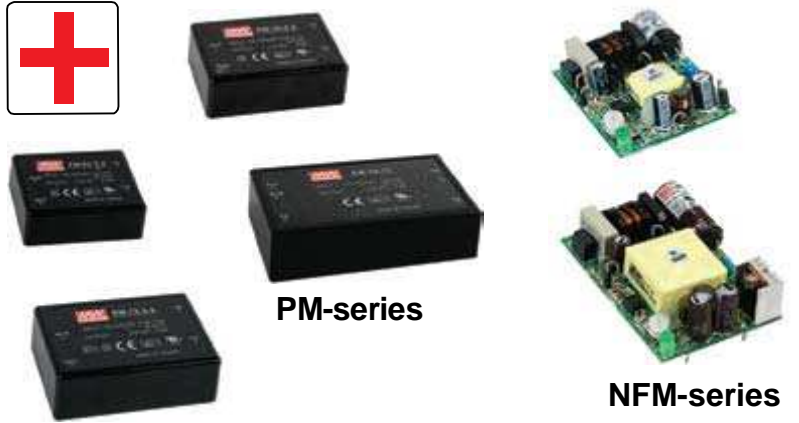

PM-series

NFM-series

Refer to www.procontech.com.au for detailed specs.

Model	Watt	Input Voltage	Single Output Rated Current (A)					Dimensions (LxWxH)
			3.3V	5V	12V	15V	24V	
PM-05-v	5	85-264VAC; 120-370VDC	1.25	1.00	0.42	0.33	0.23	62.85x50x19.7mm
PM-10-v	10	85-264VAC; 120-370VDC	2.50	2.00	0.85	0.67	0.42	70x50x22.7mm
PM-15-v	15	85-264VAC; 120-370VDC	3.50	3.00	1.25	1.00	0.63	75x53x22.7mm
PM-20-v	20	85-264VAC; 120-370VDC	4.50	4.50	1.80	1.40	0.92	94x56x22.7mm
NFM-05-v	5	85-264VAC; 120-370VDC	1.25	1.00	0.42	0.33	0.23	58x45x9.1mm
NFM-10-v	10	85-264VAC; 120-370VDC	2.50	2.00	0.85	0.67	0.42	65x45x22mm
NFM-15-v	15	85-264VAC; 120-370VDC	3.50	3.00	1.25	1.00	0.63	70x48x22mm
NFM-20-v	20	85-264VAC; 120-370VDC	4.50	4.50	1.80	1.40	0.92	89x51x19.3mm



5~65W Single Output Open Frame Series

Features

- Universal AC input / Full range
- Protection: Short circuit / Overload /Over voltage /Over Temperature
- Cooling by free air convection
- **Fixed switching frequency**
- **Low leakage current < 0.5mA**
- Low cost, high reliability
- Also available in dual (PD), triple (PT) and quad (PQ) outputs



Model	Watt	Input Voltage	Single Output Rated Current (A)									Dimensions (LxWxH)
			3.3V	5V	7.5	12V	13.5	15V	24V	27	48V	
PS-05-v	5	85-264VAC; 120-370VDC	-	1.00	-	0.45	-	0.35	0.22	-	0.11	75x40x20mm
PS-15-v	15	85-264VAC; 120-370VDC	-	2.80	-	1.25	-	1.00	0.625	-	0.313	94x49x25mm
PS-25-v	25	85-264VAC; 120-370VDC	5.00	5.00	3.30	2.10	1.90	1.70	1.00	0.90	0.50	107x61x28mm
PS-35-v	35	90-264VAC; 120-370VDC	6.00	6.00	4.70	3.00	2.60	2.40	1.50	-	0.75	101.6x50.8x24mm
PS-45-v	45	90-264VAC; 120-370VDC	8.00	8.00	5.40	3.70	3.30	3.00	1.90	1.70	1.00	127x76x28mm
PS-65-v	65	90-264VAC; 120-370VDC	12.00	12.00	8.00	5.20	4.70	4.20	2.70	2.40	1.35	127x76x42mm



PS-25



PS-35



PS-45



PS-65